

SHERPA 100 DIESEL



ENG V22.10-1



SHERPA
MINI-LOADERS

TECHNICAL DATA

SHERPA 100 DIESEL

Motor

Manufacturer	Kubota
Type	D722
Capacity	15/20 kW / hp
Revolutions per minute	3600 rpm
Adjusted amount of revolutions	2700 rpm
Number of cylinders	3
Cooling	Water cooled (coolant)
Fuel	Diesel
Fuel tank capacity	16 l

Drive system

Hydrostatic through 2 hydraulic wheel motors

Speed 315 cc wheelmotor

0-8,5 (proportional) km/h*

Speed 400 cc wheelmotor

0-7,5 (proportional) km/h*

Capacity data

Breakout force	630 kg
Tractive force 315 cc wheelmotors	285 kg*
Tractive force 400 cc wheelmotors	355 kg*
Hydraulic drive- and working system	30/190 l/bar
Hydraulic tank capacity	45 l

Tires

Standard	20x11.00-8 - Trac profile tires
Narrow	4.00-10 - Trac profile tires small

Brakes



Braking system Hydrostatic on 2 rear wheels/2 front wheels through chain transmission

Steering

Skid steering

Dimensions in mm on standard tyres

A Maximum height with bucket up	2600	J Bucket angle high	53°
B Height hinge point coupling plate	2105	K Wheelbase	657
C Maximum height with bucket low	1250	L Length to coupling plate	1508
D Length + bucket	2112	M Ground clearance	176
E Bucket angle when dumping	51°	N Rear Angle	23°
F Height underside of the bucket when dumping	1560	O Turning radius	1690
G Length from front wheel to bucket when dumping	60	P Turning radius with bucket	2265
H Height bucket horizontally	1930	Q Width	1140
I Bucket angle low	26°		

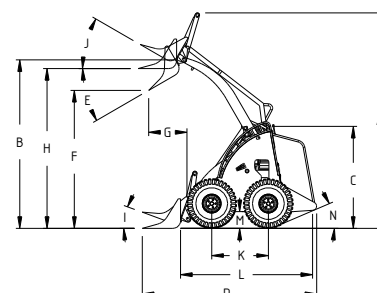

* Depending on choice of tires

specifications and features are subject to change without notice

TECHNICAL DATA

SHERPA 100 DIESEL

Electrical system

Voltage	12 V
Battery capacity	45 Ah

Max. Dimensions (L mm x B mm x H mm, without bucket):


Standard	1490 x 1140 x 1218
Narrow	1490 x 860 x 1218

Kerb weight


712 kg (with standard tires)

Tipping loads (kg)*:

Pallet forks low**

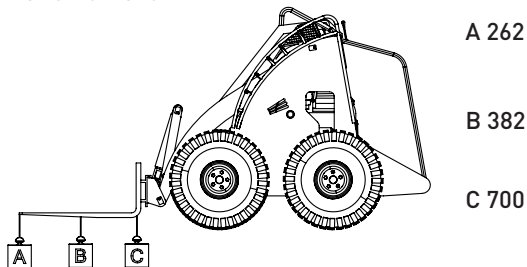

Pallet forks high**

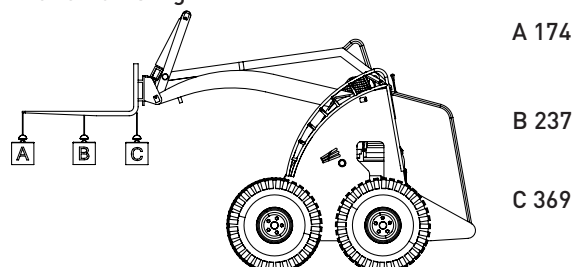

* Including driver 60kg

** Consider a safety factor of 30%

SHERPA 100 DIESEL

Outstanding is the use of hydraulic engineering for both 4WD propulsion and machine-specific functions. This makes the SHERPA 100 Diesel available in various industries.

More information?

Call us +31 412 61 33 44

Canadabaan 14 | 5388 RT Nistelrode | www.sherpaminiloaders.com

